



ENHANCE PLUS

# Engineered for world-class hearing enhancement, music, and calls. Enhance the sound, not the noise.

- › Advanced medical-grade hearing enhancement
- › Directional microphones and state-of-the-art signal processing
- › Up to 10 hours battery, with up to 30 hours total in the case
- › High-quality music, streaming, and hands-free calls\*
- › Guided set-up, personalization and support via the app
- › Compatible with iPhone®
- › IP52-rated protection against dust and water with a standard 1-year warranty\*\*



## DEVICE CONFIGURATION

Rechargeable Lithium-Ion Battery

Multi-function Push Button

IP52 Classification

### Audiological Features

NAL-NL2 Fitting Formula

Warp Compression with Adjustable Bass and Treble

Adaptive Directionality

Environment Based Noise Reduction

Expansion

Impulse Noise Reduction

Automatic Digital Feedback Suppression (DFS)

### Functional Features

Ear to Ear Data Communication

Synchronized Volume Control

Direct Stereo Audio Streaming

Microphone Mix-in

Multi-color LED Indications

Jabra Enhance™ app

Remote Firmware Updates

## TECHNICAL DATA – CHARGER

Dimensions	70.14 x 46.81 x 24.1 mm / 2.76 x 1.84 x 0.95"
Weight	33.74 g / 1.19 oz
Internal power source	Rechargeable Lithium-Ion battery, 3.7 V, 129 mAh
Charging time for internal lithium-ion battery in charger	Max 3 hours, depending on initial state of the battery
Battery life (fully charged, not connected to mains power)	Min. 30 hours use time for a pair of earbuds, without earbuds: 12 months
Charging time for earbuds	+10 °C (+50 °F) to +40 °C (+104 °F): < 3 hours, depending on initial state of the battery, <10 °C (50 °F): > 3 hours
ESD tolerance	According to IEC 61000-4-2 electrostatic discharge immunity test standard
Operating & charging temperature	+5 °C (+41 °F) to +40 °C (+104 °F) at a relative humidity range of 15 % to 90 %, non-condensing
Storage temperature	-25 °C (-13 °F) to +5 °C (+41 °F), +5 °C (+41 °F) to +35 °C (+95 °F) at a relative humidity up to 90 %, non-condensing, > 35 °C (95 °F) to 70 °C (158 °F) at a water vapor pressure up to 50 hPa



\*Hands-free calling requires iPhone 11 or later and iOS 15.1 or later

\*\*Registration required through the Jabra Enhance app


# TECHNICAL DATA – EARBUDS

IEC 60118-0: 1983\_AMD1:1994  
IEC 60118-0:2015


ANSI S3.22-2014  
IEC 60118-0:2015  
JIS C 5512: 2015

	IEC 711-EAR SIMULATOR		2CC COUPLER	
Reference test gain (60 dB SPL input)	1600 Hz	20 dB	HFA	25 dB
Full-on gain (50 dB SPL input)	Max	38 dB	Max	32 dB
Full-on gain (50 dB SPL input)	1600 Hz	28 dB	HFA	26 dB
Maximum output (90 dB SPL input)	Max	117 dB SPL	Max	110 dB SPL
Maximum output (90 dB SPL input)	1600	108 dB SPL	HFA	104 dB SPL
Total harmonic distortion	500 Hz	0.2%	500 Hz	0.4%
Total harmonic distortion	800 Hz	0.4%	800 Hz	0.4%
Total harmonic distortion	1600 Hz	0.6%	1600 Hz	1.0%
Total harmonic distortion	-	-	3200 Hz	0.3%
Equivalent input noise, w/o noise reduction	1600 Hz	26 dB SPL	HFA	24 dB SPL
1/3 Octave equivalent input noise, w/o noise reduction	1600 Hz	10 dB SPL	1600 Hz	10 dB SPL
Frequency range IEC 60118-0: 2015 (*)	HFA	100–9240 Hz	HFA	100–8700 Hz
Battery lifetime	-	10 hours	-	10 hours


**Maximum Output (OSPL90)  
– 118-0 (711 coupler)**

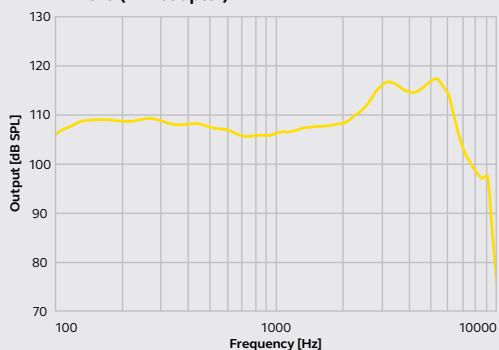


**Full-On and Reference Test Gain  
– 118-0 (711 coupler)**

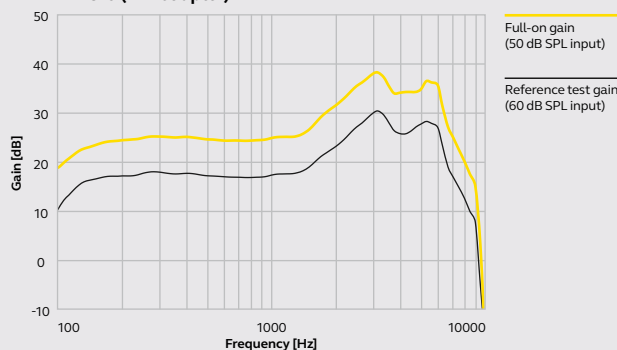


**Maximum Output (OSPL90)  
– 118-0 (2CC coupler)**

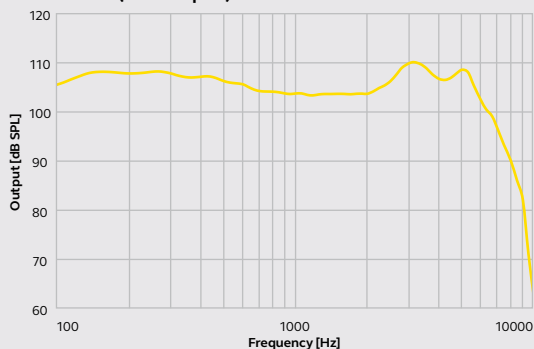

**Full-On and Reference Test Gain  
– 118-0 (2CC coupler)**

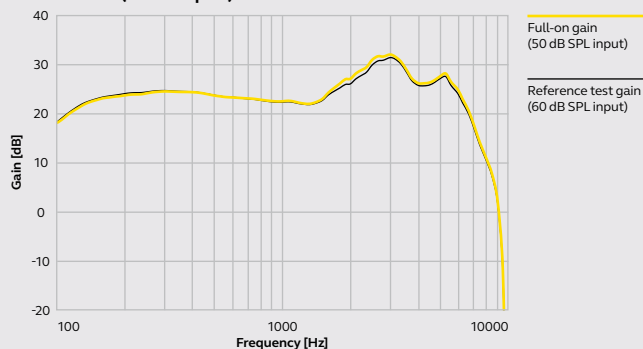

**Fitting range**

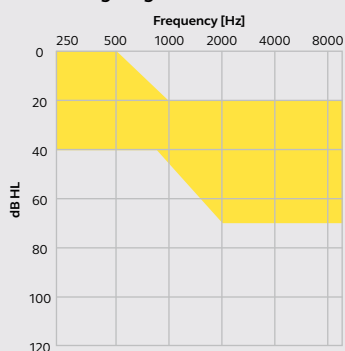

**Manufacturer:**

GN Hearing A/S  
Lautrupbjerg 7  
DK-2750 Ballerup  
Denmark

**Distributor:**

GN Hearing Care Corporation  
8001 E Bloomington Freeway  
Bloomington, MN 55420  
USA